

Tread All Lands



 www.atlandertyre.com

 info@atlandertire.com



Brand Profile

ATLANDER, as a premium brand, has fully implemented Industry 4.0 technologies, utilizing the most advanced production processes, equipment, and highest quality raw materials to produce both semi-steel and all-steel tires. In the semi-steel category, the tires exhibit high wear resistance, excellent dynamic balance uniformity, and superior European standards, outperforming other industry competitors. In the all-steel category, each tire demonstrates high wear resistance, high load capacity, and remarkable dynamic balance uniformity.

The ATLANTER team consists of several technical engineers with front-line brand experience, constantly guided by market demand to enhance product quality and innovate, thus offering customers increasingly superior products. To better meet customer needs and product delivery, ATLANTER has production bases in China, Thailand, and Cambodia.

With a systematic full-service support system encompassing pre-sales, sales, and after-sales, ATLANTER recognizes the importance of marketing to the enterprise, offering comprehensive marketing support. Whether online or offline, professional services and support are provided to clients, ensuring that they can effectively promote our products.

ATLANDER adheres to the philosophy of pursuing survival through quality and development through innovation, continuously strengthening itself to provide customers with even higher quality tire products and services.



Silent-Sponge Tire

ATL NRT 3to9 dB

High-tech Polyurethane Sponge
Silence Starts with the Tire, Comfort Follows

Long-lasting Adhesion
Throughout the Life Cycle

Noise Reduction of 3-11dB

Extra Weight Below 300g,
No Effect on Balance

No Impact on Routine Tire Care



Self-Sealing Tire

ATL TSHT

No Fear of Punctures Hardcore Protection
Travel with confidence

- All-Time Super Memory Self-Healing MPN Coating in the airtight layer
- Coating Thickness: 3-5mm in the tread area
- Puncture Protection: Shields against sharp objects <6mm in diameter
- Wound Resistance: Repairs cuts up to 10cm long and 3mm wide, preventing blowouts
- Temperature Range: -40°C to 170°C
- Puncture Recovery: Fixes 80% of screw punctures, 90% of nail punctures
- Warranty: 3 years or 50,000 km



TABLE OF CONTENTS

HP	UHP	VAN	ALL SEASON
----	-----	-----	------------

LanderXsport ATL33 09

LanderXsport ATL36 15

LanderVan ATL18 21

LanderAllseason ATL55 29

LanderVan ATL28 25

LanderAllseason ATL56 33

WINTER

LanderWinter ATL75 39

LanderStuds ATL77 43

LanderStuds ATL78 47

Drive With Freedom Explore Without Limits

Exceptional durability extends tyre life, ensuring performance under all conditions.



HP

Engineered for mastery on the road



Comfort



High performance




Drainage



Wet

Performance test:

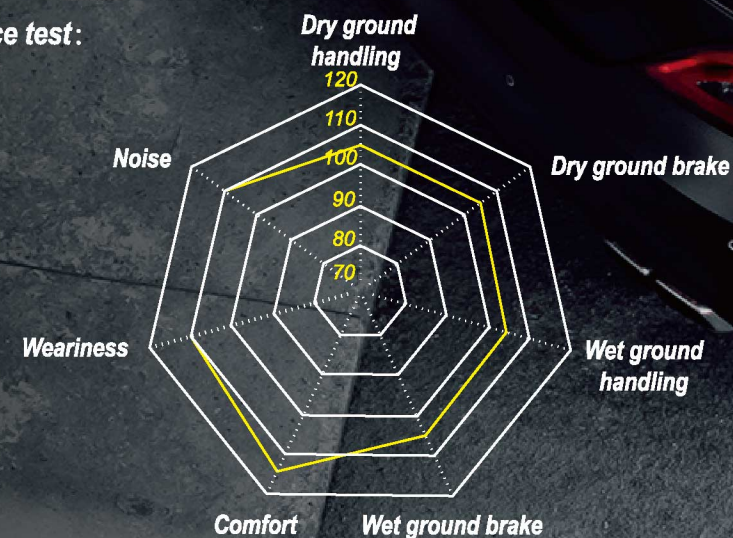


LanderXsport ATL33



Central continuous patterned rib:
Improve straight stability.



The tread groove edge adopts a sloping chamfer design:
The flat structure can prevent abnormal wear caused by tire curling during braking and shorten the braking distance.

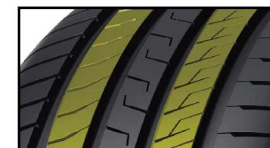

Applying virtual simulation calculation to achieve rigid optimization of pattern blocks:
The optimized groove divides the tread pattern blocks into optimal segments to ensure quiet and comfortable cushioning performance during driving.



Asymmetric design of inner and outer patterns:
The semi enclosed shoulder pattern block on the outer side provides more stable lateral support when the car is turning, improving the driving stability of the entire vehicle.



The use of a new generation of formula technology, ultra-high silica filling, the addition of a variety of functional resins and polyfunctional solution styrene butadiene to comprehensively improve the grip performance of the tire in wetlands and dry underground, while maximizing the balance of rolling resistance, to achieve a double breakthrough in driving safety and low fuel consumption. The use of high-efficiency silica mixing equipment realizes the nanoscale dispersion of silica, which improves the wear resistance of tires and reduces the rolling resistance of tires.



LanderXsport ATL33

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity	Max Permissive Pressure	UTQG
155/65R13	73T	4½J	532	157	365 805	300 44	400AA
155/70R13	75T	4½J	548	157	387 853	300 44	400AA
155/80R13	79T	4½J	578	157	437 963	300 44	400AA
165/65R13	77T	5J	544	170	412 908	300 44	400AA
165/70R13	79T	5J	562	170	437 963	300 44	400AA
175/70R13	82T	5J	576	177	475 1047	300 44	400AA
185/70R13	86T	5½J	590	189	530 1168	300 44	400AA
155/65R14	75T	4½J	558	157	387 853	300 44	400AA
165/55R14	72V	5J	538	170	355 783	300 44	400AA
165/60R14	75H	5J	554	170	387 853	300 44	400AA
165/65R14	79T	5J	570	170	437 963	300 44	400AA
165/70R14	81T XL	5J	588	170	462 1019	300 44	400AA
175/65R14	82H	5J	584	177	475 1047	300 44	400AA
175/70R14	84T	5J	602	177	500 1102	300 44	400AA
185/60R14	82H	5½J	578	189	475 1047	300 44	400AA
185/65R14	86H	5½J	596	189	530 1168	300 44	400AA
185/70R14	88T	5½J	616	189	560 1235	300 44	400AA
195/70R14	91T	6J	630	201	615 1356	300 44	400AA
165/60R15	81T XL	5J	579	170	462 1019	340 49	400AA
175/50R15	75V	5½J	557	182	387 853	300 44	400AA
175/55R15	77H	5½J	573	182	412 908	300 44	400AA
175/60R15	81H	5J	591	177	462 1019	300 44	400AA
175/65R15	84H	5J	609	177	500 1102	300 44	400AA

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity	Max Prmissive Pressure	UTQG
185/55R15	82V	6J	585	194	475 1047	300 44	400AA
185/60R15	84H	5½J	603	189	500 1102	300 44	400AA
185/65R15	88H	5½J	621	189	560 1235	300 44	400AA
195/50R15	82V	6J	577	201	475 1047	300 44	400AA
195/55R15	85V	6J	595	201	515 1135	300 44	400AA
195/60R15	88H/88V	6J	615	201	560 1235	300 44	400AA
195/65R15	91V	6J	635	201	615 1356	300 44	400AA
205/60R15	91V	6J	627	209	615 1356	300 44	400AA
205/65R15	94V	6J	647	209	670 1477	300 44	400AA
205/70R15	96H	6J	669	209	710 1565	300 44	400AA
215/70R15	98H	6½J	683	221	750 1653	300 44	400AA
185/55R16	87V XL	6J	610	194	545 1201	340 49	400AA
195/50R16	84V	6J	602	201	500 1102	300 44	400AA
195/55R16	87V XL	6J	620	201	545 1201	300 44	400AA
205/55R16	91V/91W	6½J	632	214	615 1356	300 44	400AA
205/60R16	92V	6J	652	209	630 1389	300 44	400AA
205/65R16	95H	6J	672	209	690 1521	300 44	400AA
215/60R16	95V	6½J	664	221	690 1521	300 44	400AA
215/65R16	98H	6½J	686	221	750 1653	300 44	400AA
225/60R16	98H	6½J	676	228	750 1653	300 44	400AA
235/60R16	100H	7J	688	240	800 1764	300 44	400AA

Freedom To Roam Fantastic Trips Await

Tailored for high-speed stability and the ultimate driving thrill.



UHP

Speed beyond the wind



Comfort



High performance




Drainage



Silence

Performance test:

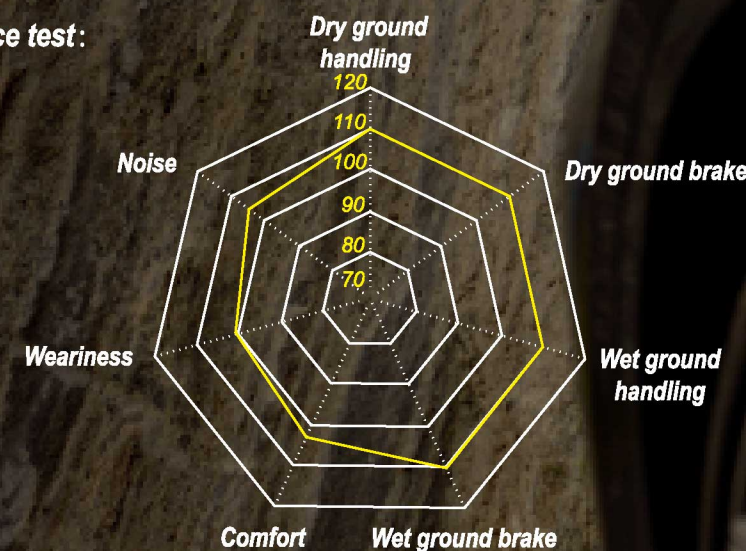

LanderXsport ATL36



Prevent floating design:

The outer side of the pattern adopts a sharp and tortuous groove design, with sharp angles supplemented by edge cutting angles. Different geometric structures and positions of the pattern grooves cut the water film from multiple angles to ensure the reliability of wetland bending.



Dry/wet braking performance:

The optimized balance of tire tread block strength enables short distance braking in both dry and wet conditions.



Wide longitudinal groove:

Rapid and effective drainage;
Improve heat dissipation efficiency to ensure stable performance during high-speed driving.



Double layer nylon crown strap layer:

The tire crown area adopts a double-layer nylon crown belt structure to ensure accurate handling of the ultra-high performance product with a speed level of Y during high-speed driving.



LanderXsport ATL36

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
195/45R15	78V	6½J	557	195	425	937	300	44	320AA
195/45R16	84V XL	6½J	582	195	500	1102	340	49	320AA
205/45R16	87W XL	7J	590	206	545	1201	340	49	320AA
205/50R16	91W XL	6½J	612	214	615	1356	340	49	320AA
205/55R16	94W XL	6½J	632	214	670	1477	340	49	320AA
215/45R16	90W XL	7J	600	213	600	1323	340	49	320AA
215/55R16	97W XL	7J	642	226	730	1609	340	49	320AA
225/55R16	99W XL	7J	654	233	775	1709	340	49	320AA
205/40R17	84W XL	7½J	596	212	500	1102	340	49	320AA
205/45R17	88W XL	7J	616	206	560	1235	340	49	320AA
205/50R17	93W XL	6½J	638	214	650	1433	340	49	320AA
205/55R17	95W XL	6½J	658	214	690	1521	340	49	320AA
215/45R17	91W XL	7J	626	213	615	1356	340	49	320AA
215/50R17	95W XL	7J	648	226	690	1521	340	49	320AA
215/55R17	98W XL	7J	668	226	750	1653	340	49	320AA
225/45ZR17	94Y XL	7½J	634	225	670	1477	340	49	320AA
225/50ZR17	98Y XL	7J	658	233	750	1653	340	49	320AA
225/55R17	101W XL	7J	680	233	825	1819	340	49	320AA
235/45R17	97W XL	8J	644	236	730	1609	340	49	320AA
235/50R17	100W XL	7½J	668	245	800	1764	340	49	320AA
235/55R17	103W XL	7½J	690	245	875	1929	340	49	320AA
245/40R17	95W XL	8½J	628	248	690	1521	340	49	320AA
245/45R17	99W XL	8J	652	243	775	1709	340	49	320AA
215/40ZR18	89Y XL	7½J	629	218	580	1279	340	49	320AA
215/45ZR18	93Y XL	7J	651	213	650	1433	340	49	320AA
215/50R18	92W	7J	673	226	630	1389	300	44	320AA
215/55R18	99W XL	7J	693	226	775	1709	340	49	320AA
225/40ZR18	92Y XL	8J	637	230	630	1389	340	49	320AA

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
225/45ZR18	95Y XL	7½J	659	225	690	1521	340	49	320AA
225/50R18	99W XL	7J	683	233	775	1709	340	49	320AA
225/55R18	102W XL	7J	705	233	850	1874	340	49	320AA
235/40ZR18	95Y XL	8½J	645	241	690	1521	340	49	320AA
235/45ZR18	98Y XL	8J	669	236	750	1653	340	49	320AA
235/50ZR18	101Y XL	7½J	693	245	825	1819	340	49	320AA
235/55R18	104W XL	7½J	715	245	900	1984	340	49	320AA
245/35ZR18	92Y XL	8½J	629	248	630	1389	340	49	320AA
245/40ZR18	97Y XL	8½J	653	248	730	1609	340	49	320AA
245/45ZR18	100Y XL	8J	677	243	800	1764	340	49	320AA
255/35ZR18	94Y XL	9J	635	260	670	1477	340	49	320AA
255/40ZR18	99Y XL	9J	661	260	775	1709	340	49	320AA
255/45ZR18	103Y XL	8½J	687	255	875	1929	340	49	320AA
255/55R18	109W XL	8J	737	265	1030	2271	340	49	320AA
265/35ZR18	97Y XL	9½J	643	271	730	1609	340	49	320AA
225/35ZR19	88Y XL	8J	641	230	560	1235	340	49	320AA
225/40ZR19	93Y XL	8J	663	230	650	1433	340	49	320AA
225/45ZR19	96Y XL	7½J	685	225	710	1565	340	49	320AA
225/55R19	103W XL	7J	731	233	875	1929	340	49	320AA
235/35ZR19	91Y XL	8½J	647	241	615	1356	340	49	320AA
235/40ZR19	96Y XL	8½J	671	241	710	1565	340	49	320AA
235/45ZR19	99Y XL	8J	695	236	775	1709	340	49	320AA
235/50ZR19	103Y XL	7½J	719	245	875	1929	340	49	320AA
235/55ZR19	105Y XL	7½J	741	245	925	2039	340	49	320AA
245/35ZR19	93Y XL	8½J	655	248	650	1433	340	49	320AA
245/40ZR19	98Y XL	8½J	679	248	750	1653	340	49	320AA
245/45ZR19	102Y XL	8J	703	243	850	1874	340	49	320AA
255/35ZR19	96Y XL	9J	661	260	710	1565	340	49	320AA

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
255/40ZR19	100Y XL	9J	687	260	800	1764	340	49	320AA
255/50ZR19	107Y XL	8J	739	265	975	2149	340	49	320AA
255/55R19	111W XL	8J	763	265	1090	2403	340	49	320AA
275/35ZR19	100Y XL	9½J	675	278	800	1764	340	49	320AA
275/40ZR19	105Y XL	9½J	703	278	925	2039	340	49	320AA
245/35ZR20	95Y XL	8½J	680	248	690	1521	340	49	320AA
245/40ZR20	99Y XL	8½J	704	248	775	1709	340	49	320AA
245/45ZR20	103Y XL	8J	728	243	875	1929	340	49	320AA
255/35ZR20	97Y XL	9J	686	260	730	1609	340	49	320AA
255/45ZR20	105Y XL	8½J	738	255	925	2039	340	49	320AA
255/50R20	109W XL	8J	764	265	1030	2271	340	49	320AA
255/55R20	110W XL	8J	788	265	1060	2337	340	49	320AA
265/50R20	111W XL	8½J	774	277	1090	2403	340	49	320AA
275/30ZR20	97Y XL	9½J	674	278	730	1609	340	49	320AA
275/35ZR20	102Y XL	9½J	700	278	850	1874	340	49	320AA
275/40ZR20	106Y XL	9½J	728	278	950	2094	340	49	320AA
275/45ZR20	110Y XL	9J	756	273	1060	2337	340	49	320AA
275/60R20	116W XL	8J	838	279	1250	2756	340	49	320AA
285/50R20	116W XL	9J	794	297	1250	2756	340	49	320AA
265/45ZR21	108Y XL	9J	771	266	1000	2205	340	49	320AA
295/35ZR21	107Y XL	10½J	739	301	975	2149	340	49	320AA
295/40ZR21	111Y XL	10½J	769	301	1090	2403	340	49	320AA
315/35ZR21	111Y XL	11J	753	320	1090	2403	340	49	320AA

*SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
*245/35R21	96Y XL	-	-	-	-	-	-	-	-
*255/40R21	102Y XL	-	-	-	-	-	-	-	-
*265/40R21	105Y XL	-	-	-	-	-	-	-	-
*275/35R21	103Y XL	-	-	-	-	-	-	-	-
*275/40R21	107Y XL	-	-	-	-	-	-	-	-
*275/45R21	110Y XL								
*285/40R21	109Y XL	-	-	-	-	-	-	-	-
*275/35R22	104Y XL	-	-	-	-	-	-	-	-
*275/40R22	108Y XL	-	-	-	-	-	-	-	-
*285/40R22	110Y XL	-	-	-	-	-	-	-	-
*285/45R22	114Y XL	-	-	-	-	-	-	-	-
*315/30R22	107Y XL	-	-	-	-	-	-	-	-
*315/35R22	111Y XL	-	-	-	-	-	-	-	-
*325/35R22	110Y XL	-	-	-	-	-	-	-	-
*325/40R22	114Y XL	-	-	-	-	-	-	-	-
*285/35ZR23	107Y XL	-	-	-	-	-	-	-	-
*285/40R23	107Y XL	-	-	-	-	-	-	-	-
*325/30ZR23	109Y XL	-	-	-	-	-	-	-	-
*325/35R23	111Y XL	-	-	-	-	-	-	-	-

Smoother Journeys Ahead

Extra tough, high capacity, fuel-saving, perfect for home and commercial use.

VAN

Affordable durable and secure



Economical



High performance




Braking



Mileage

Performance test:

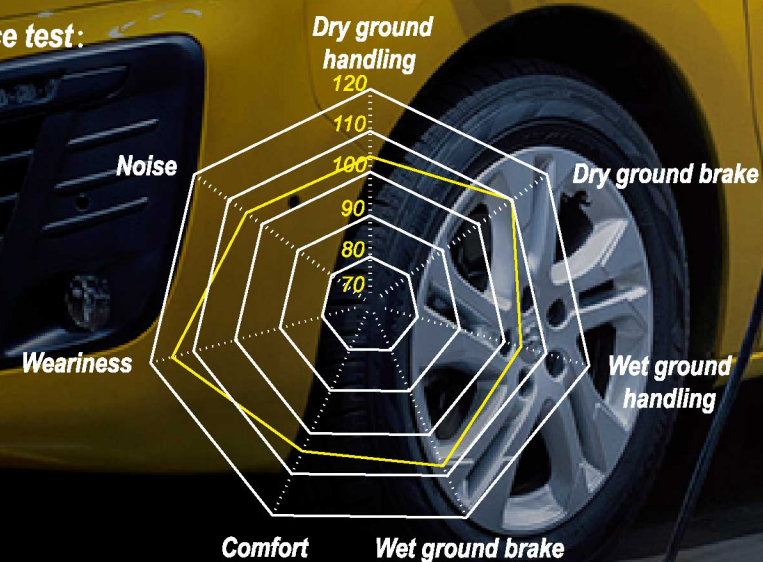


LanderVan ATL18



Mesh tread pattern design:

It has excellent adaptability to urban and suburban road surfaces. The rigidity of each part of the tread block is uniform, which can balance the ground pressure and effectively prevent uneven wear under load; At the same time, it can provide reliable traction under all-weather conditions.

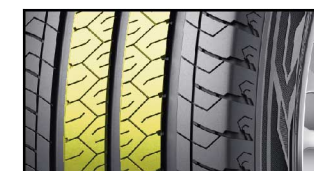

Straight longitudinal groove design:

Optimizes the zigzag longitudinal grooves of traditional VAN tires to straight lines, improving drainage efficiency, preventing skidding on slippery wet surfaces, and shortening the braking distance on wet ground.



Belt package full-edge design:

The edges of the belt package are U-shaped wrapped with rubber sheets, effectively reducing the tension at the edges of the steel wire belt package, enhancing driving safety under load conditions; Effectively improves the tire's anti-aging performance and extends its service life.



LanderVan ATL18

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
185R14C	102/100S-8PR	5½J	650	188	850/ 800	1874/ 1764	450	65	-
175/70R14C	95/93T-6PR	5J	602	177	690/ 650	1521/ 1433	375	54	-
185/75R16C	104/102S-8PR	5J	684	184	900/ 850	1984/ 1874	475	69	-
195/65R16C	104/102T-8PR	6J	660	201	900/ 850	1984/ 1874	475	69	-
195/70R15C	104/102S-8PR	6J	655	201	900/ 850	1984/ 1874	450	65	-
195/75R16C	110/108R-10PR	5½J	698	196	1060/ 1000	2337/ 2205	525	76	-
195/75R16C	107/105S-8PR	5½J	698	196	975/ 925	2149/ 2039	475	69	-
205/65R16C	107/105T-8PR	6J	672	209	975/ 925	2149/ 2039	475	69	-
205/70R15C	106/104S-8PR	6J	669	209	950/ 900	2094/ 1984	450	65	-
205/75R16C	110/108S-8PR	5½J	714	203	1060/ 1000	2337/ 2205	475	69	-
215/60R17C	109/107T-8PR	6½J	690	221	1030/ 975	2271/ 2149	475	69	-
215/65R15C	104/102T-6PR	6½J	661	221	900/ 850	1984/ 1874	375	54	-
215/65R16C	109/107T-8PR	6½J	686	221	1030/ 975	2271/ 2149	475	69	-
215/70R15C	109/107S-8PR	6½J	683	221	1030/ 975	2271/ 2149	450	65	-
215/75R16C	113/111S-8PR	6J	728	216	1150/ 1090	1874/ 2403	475	69	-
225/65R16C	112/110T-8PR	6½J	698	228	1120/ 1060	2469/ 2337	475	69	-
225/70R15C	112/110S-8PR	6½J	697	228	1120/ 1060	2469/ 2337	450	65	-
225/75R16C	121/120R-10PR	6J	744	223	1450/ 1400	3197/ 3086	575	83	-
235/65R16C	115/113T-8PR	7J	712	240	1215/ 1150	2679/ 2535	475	69	-



Your Reliable Commercial Partner



Comfort



High performance



Drainage




Wet



M+S

Performance test:

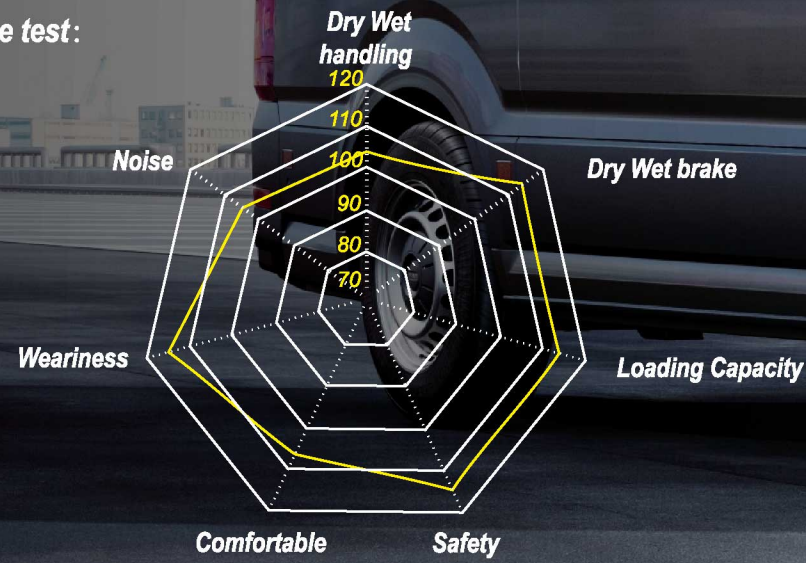

LanderVan ATL28



Special Zigzag Groove design

4 Zigzag grooves provided excellent drainage and increased the stiffness of block, also can fully contact the ground to improve tire load capacity and grip.




Tire-bar

Center with tire-bar and more kerfs make sure tires have better brake on the all kinds road.



Closed shoulder design

Tire half closed shoulder with bigger block make sure tire have better handling and reduce tire noise.

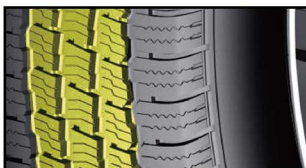

Excellent shoulder S sipe

S sipes on the tire shoulder improves ice and snow performance.



SIZE	Index	Rim	OA.diameter MM	Width MM	Max Loading Capacity	Max Permissive Pressure	UTQG
185/75R16C	104/102R-8PR	5J	684	184	900/850 1984/1874	475 69	-
195/75R16C	110/108R-10PR	5½J	698	196	1060/1000 2337/2205	525 76	-
195/75R16C	107/105S-8PR	5½J	698	196	975/925 2149/2039	475 69	-

Year-round Performance Easy and Safe

Adapts to diverse climates and surfaces, delivering excellent grip and control on dry and wet surfaces, while ensuring durability and fuel efficiency.



ALL SEASONS

All-season companion



Comfort



High performance




Drainage



Wet

Performance test:

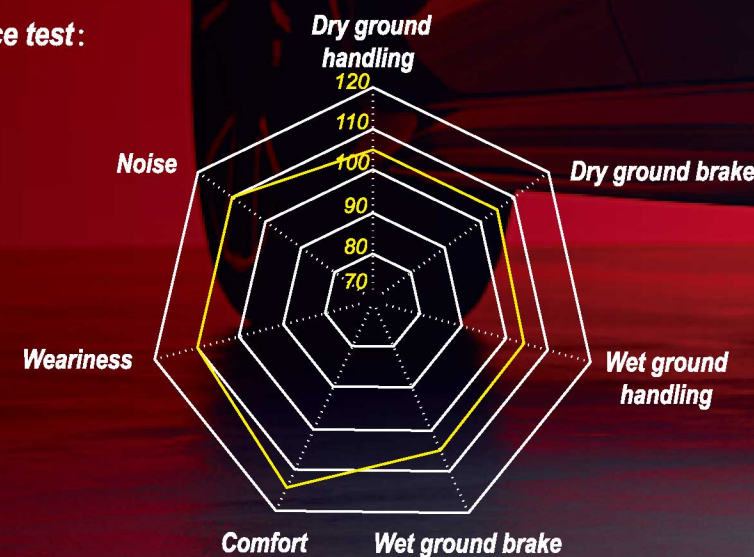

LanderAllseason ATL55



V-shaped tread groove design:

Adopting a wide groove design to improve drainage performance. Longitudinal stepped grooves: While ensuring effective drainage, they maintain the strength of the tread blocks.



Optimized combination of various sipes patterns:

The combination of zigzag and straight sipes patterns ensures that the tire has good traction on dry, wet, and light snow surfaces.



Groove depth stepping:

By disrupting the frequency of sound waves within the grooves, the sound waves in the grooves are decomposed into inaudible low-frequency sound waves, providing a quiet interior environment.



Sipe pattern edges feature a chamfered design:

Balancing the rigidity and flexibility of the tread blocks to adapt to the temperature differences between winter and summer.



LanderAllseason ATL55

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG	SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG	
155/65R13	73T	4½J	4.50B	532	157	365	805	300	44	400AA	215/60R16	99V XL	6½J	664	221	775	1709	340	49	400AA
155/70R13	75T	4½J	4.50B	548	157	387	853	300	44	400AA	215/65R16	102V XL	6½J	686	221	850	1874	340	49	400AA
155/80R13	79T	4½J	4.50B	578	157	437	963	300	44	400AA	215/70R16	100H	6.5J	708	221	800	1764	340	49	400AA
155/65R14	75T	4½J		558	157	387	853	300	44	400AA	225/55R16	99W XL	7J	654	233	775	1709	340	49	400AA
165/70R13	79T	5J,	5.00B	562	170	437	963	300	44	400AA	205/45R17	88W XL	7J	616	206	560	1235	340	49	400AA
175/70R13	82T	5J,	5.00B	576	177	475	1047	300	44	400AA	205/50R17	93W XL	6½J	638	214	650	1433	340	49	400AA
165/65R14	79T	5J		570	170	437	963	300	44	400AA	205/55R17	95W XL	6½J	658	214	690	1521	340	49	400AA
165/70R14	81T	5J		588	170	462	1019	300	44	400AA	215/40R17	87V XL	7.5J	604	218	545	1201	340	49	400AA
175/65R14	82T	5J		584	177	475	1047	300	44	400AA	215/45R17	91W XL	7J	626	213	615	1356	340	49	400AA
175/70R14	88T XL	5J		602	177	560	1235	340	49	400AA	215/50R17	95W XL	7J	648	226	690	1521	340	49	400AA
185/65R14	86H	5½J		596	189	530	1168	300	44	400AA	215/55R17	98W XL	7J	668	226	750	1653	340	49	400AA
175/65R15	84H	5J		609	177	500	1102	300	44	400AA	215/60R17	100V XL	6½J	690	221	800	1764	340	49	400AA
185/60R15	84H	5½J		603	189	500	1102	300	44	400AA	225/45R17	91W	7½J	634	225	615	1356	300	44	400AA
185/55R15	82H	6J		585	194	475	1047	300	44	400AA	225/50R17	94W	7J	658	233	670	1477	300	44	400AA
185/65R15	88H	5½J		621	189	560	1235	300	44	400AA	225/55R17	101W XL	7J	680	233	825	1819	340	49	400AA
195/55R15	85V	6J		595	201	515	1135	300	44	400AA	225/60R17	103V XL	6½J	702	228	875	1929	340	49	400AA
195/65R15	91H	6J		635	201	615	1356	300	44	400AA	225/65R17	102V	6½J	724	228	850	1874	300	44	400AA
195/45R16	84V XL	6½J		582	195	500	1102	340	49	400AA	235/45R17	97W XL	8J	644	236	730	1609	340	49	400AA
195/55R16	87V	6J		620	201	545	1201	300	44	400AA	235/55R17	103W XL	7½J	690	245	875	1929	340	49	400AA
205/45R16	87W XL	7J		590	206	545	1201	340	49	400AA	235/65R17	108V XL	7J	738	240	1000	2205	340	49	400AA
205/55R16	91H	6½J		632	214	615	1356	300	44	400AA	245/45R17	99W XL	8J	652	243	775	1709	340	49	400AA
205/60R16	92H	6J		652	209	630	1389	300	44	400AA	215/55R18	99V XL	7J	693	226	775	1709	340	49	400AA
215/45R16	90V XL	7J		600	213	600	1323	340	49	400AA	225/40ZR18	92Y XL	8J	637	230	630	1389	340	49	400AA
215/55R16	97W XL	7J		642	226	730	1609	340	49	400AA	225/45R18	95W XL	7½J	659	225	690	1521	340	49	400AA

SIZEIndexRimOA.diameterWidthMax Loading CapacityMax Permissive PressureUTQG										*SIZEIndexRimOA.diameterWidthMax Loading CapacityMax Permissive PressureUTQG									
225/55R18	98V	7J	705	233	750	1653	300	44	400AA	*235/40R19	96YXL	-	-	-	-	-	-	-	-
235/40ZR18	95YXL	8½J	645	241	690	1521	340	49	400AA	*235/50R19	103WXL	-	-	-	-	-	-	-	-
235/45ZR18	98YXL	8J	669	236	750	1653	340	49	400AA	*245/35R19	93YXL	-	-	-	-	-	-	-	-
235/50R18	101VXL	7½J	693	245	825	1819	340	49	400AA	*255/30R19	91Y	-	-	-	-	-	-	-	-
235/55R18	104VXL	7½J	715	245	900	1984	340	49	400AA	*255/40R19	100YXL	-	-	-	-	-	-	-	-
235/60R18	107WXL	7J	739	240	975	2149	340	49	400AA	*255/45ZR19	104YXL								
245/40ZR18	97YXL	8½J	653	248	730	1609	340	49	400AA	*275/35R19	100YXL	-	-	-	-	-	-	-	-
245/45ZR18	100YXL	8J	677	243	800	1764	340	49	400AA	*195/55R20	95HXL	-	-	-	-	-	-	-	-
155/70R19	84T	4½J	701	157	500	1102	300	44	400AA	*255/35ZR20	97YXL	-	-	-	-	-	-	-	-
205/55R19	97VXL	6½J	709	214	730	1609	340	49	400AA	*235/35ZR20	92YXL	-	-	-	-	-	-	-	-
225/35ZR19	88YXL	8J	641	230	560	1235	340	49	400AA	*235/45R20	100WXL	-	-	-	-	-	-	-	-
225/40R19	93WXL	8J	663	230	650	1433	340	49	400AA	*235/50R20	104WXL	-	-	-	-	-	-	-	-
225/45ZR19	96YXL	7½J	685	225	710	1565	340	49	400AA	*245/35ZR20	95YXL	-	-	-	-	-	-	-	-
225/55R19	99W	7J	731	233	775	1709	300	44	400AA	*245/40ZR20	99YXL	-	-	-	-	-	-	-	-
235/35ZR19	91YXL	8½J	647	241	615	1356	340	49	400AA	*245/45ZR20	103YXL	-	-	-	-	-	-	-	-
235/40ZR19	96YXL	8½J	671	241	710	1565	340	49	400AA	*255/40ZR20	101YXL	-	-	-	-	-	-	-	-
235/45R19	99WXL	8J	695	236	775	1709	340	49	400AA	*255/45ZR20	105YXL	-	-	-	-	-	-	-	-
235/55R19	105WXL	7½J	741	245	925	2039	340	49	400AA	*275/40ZR20	106YXL	-	-	-	-	-	-	-	-
245/40ZR19	98YXL	8½J	679	248	750	1653	340	49	400AA										
245/45ZR19	102YXL	8J	703	243	850	1874	340	49	400AA										
255/35ZR19	96YXL	9J	661	260	710	1565	340	49	400AA										

Rain or Snow, Smooth Travels All Year



Comfort



High performance



Drainage




Wet




3 PMSF

Performance test:

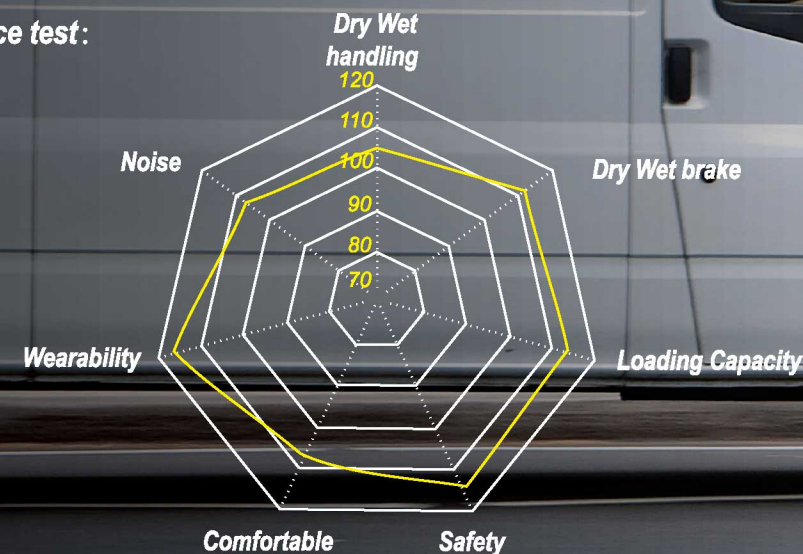


LanderAllseason ATL56



Riple groove design

Improved drainage performance with triple main groove design. 3D side adds extra contact area on snow, condition for better grip force.

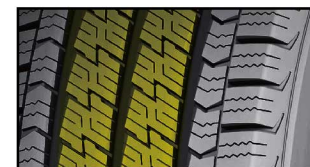

Prevent irregular wear design

Shallow grooves at tire shoulder prevent uneven wear and enhance handling performance.



Excellent center grip design

Central sipe design can balance comfort and grip force.



Excellent shoulder offset design

Tire closed shoulder with bigger block and offset enhance handling when cornering, also can reduce tire noise.



Excellent shoulder S sipe

S sipes on the tire shoulder improves ice and snow performance.



LanderAllseason ATL56

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
175/65R14C	90/88T-6PR	5J	584	177	600/ 560	1323/ 1235	375	54	-
195/70R15C	104/102S-8PR	6J	655	201	900/ 850	1984/ 1874	450	65	-
215/65R15C	104/102T-6PR	6½J	661	221	900/ 850	1984/ 1874	375	54	-
215/70R15C	109/107S-8PR	6½J	683	221	1030/ 975	2271/ 2149	450	65	-
225/70R15C	112/110S-8PR	6½J	697	228	1120/ 1060	2469/ 2337	450	65	-
195/60R16C	99/97H-6PR	6J	640	201	775/ 730	1709/ 1609	375	54	-
195/75R16C	110/108S-10PR	5½J	698	196	1060/ 1000	2337/ 2205	525	76	-
195/75R16C	107/105R-8PR	5½J	698	196	975/ 925	2149/ 2039	475	69	-
205/75R16C	113/111S-10PR	5½J	714	203	1060/ 1000	2337/ 2205	475	69	-
215/65R16C	109/107T-8PR	6½J	686	221	1030/ 975	2271/ 2149	475	69	-
215/75R16C	113/111R-8PR	6J	728	216	1150/ 1090	1874/ 2403	475	69	-
225/65R16C	112/110S-8PR	6½J	698	228	1120/ 1060	2469/ 2337	475	69	-
225/75R16C	121/120R-10PR	6J	744	223	1450/ 1400	3197/ 3086	575	83	-
235/65R16C	121/119R-10PR	7J	712	240	1450/ 1400	3197/ 3086	575	83	-
235/65R16C	115/113S-8PR	7J	712	240	1215/ 1150	2679/ 2535	475	69	-
205/65R16C	107/105T-8PR	6J	672	209	975/ 925	2149/ 2039	475	69	-
185/75R16C	104/102S-8PR	5J	684	184	900/ 850	1984/ 1874	475	69	-

Dominate Icy Terrains

Retains softness in the cold, providing superior grip and safer driving on icy roads.



WINTER


Fearless in Winter Drive with Ease



Performance test:




LanderWinter ATL75

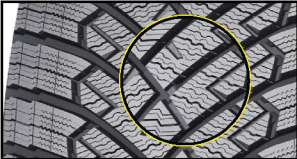

V-shaped tread groove design

V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly, bigger tread width design make sure tires enough contact road have better grip and safety

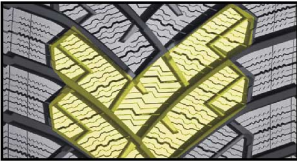


3 type 3D sipes

3 type 3D sipes balance tire stiffness make sure more stability and better grip when driving



Wide and thin 3D sipe

3D sipes alternating distribution with wide and thin, wide sipes make sure tires have better grip and brake on big snow road, thin sipes together with knurling make sure tires have better grip and brake on big small snow and ice road

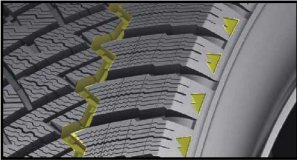

Groove ejector

Small ejector under the groove quickly clean up snow and stones, also reduce tire noise



LanderWinter ATL75

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure	
155/65R13	73T	4½J	532	157	365	805	300	44
155/70R13	75T	4½J	548	157	387	853	300	44
175/70R13	82T	5J	576	177	475	1047	300	44
165/70R14	81T	5J	588	170	462	1019	300	44
175/65R14	86T XL	5J	584	177	530	1168	340	49
175/70R14	88T XL	5J	602	177	560	1235	340	49
185/60R14	82T	5½J	578	189	475	1047	300	44
185/65R14	86T	5½J	596	189	530	1168	300	44
185/70R14	88T	5½J	616	189	560	1235	300	44
195/70R14	91T	6J	630	201	615	1356	300	44
185/55R15	86V XL	6J	585	194	530	1168	340	49
185/60R15	88T XL	5½J	603	189	560	1235	340	49
185/65R15	92T XL	5½J	621	189	630	1389	340	49
195/50R15	82H	6J	577	201	475	1047	300	44
195/55R15	85H	6J	595	201	515	1135	300	44
195/60R15	88H	6J	615	201	560	1235	300	44
195/65R15	95T XL	6J	635	201	690	1521	340	49
205/65R15	94H	6J	647	209	670	1477	300	44
205/70R15	96T	6J	669	209	710	1565	300	44
195/55R16	91V XL	6J	620	201	615	1356	340	49
205/55R16	94H XL	6½J	632	214	670	1477	300	49
205/60R16	96H XL	6J	652	209	630	1389	340	49
205/65R16	99H XL	6J	672	209	775	1709	340	49
215/55R16	97H XL	7J	642	226	730	1609	340	49
215/60R16	99H XL	6½J	664	221	775	1709	340	49
215/65R16	98H	6½J	686	221	750	1653	300	44
225/55R16	99H XL	7J	654	233	775	1709	340	49
225/60R16	102H XL	6.5J	651	228	850	1874	340	49

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure	
225/70R16	107T XL	6½J	722	228	975	2149	340	49
245/70R16	111T XL	7J	750	248	1090	2403	340	49
265/70R16	112H	8J	778	272	1120	2469	300	44
205/50R17	93V XL	6½J	638	214	650	1433	340	49
215/45R17	91V XL	7J	626	213	615	1356	340	49
215/50R17	95V XL	7J	648	226	690	1521	340	49
215/55R17	98V XL	7J	668	226	750	1653	340	49
205/55R17	95V XL	6½J	658	214	690	1521	340	49
225/55R17	101V XL	7J	680	233	825	1819	340	49
235/55R17	103V XL	7½J	690	245	875	1929	340	49
215/60R17	96H	6½J	690	221	630	1389	300	44
225/45R17	94V XL	7½J	634	225	670	1477	340	49
225/50R17	98V XL	7J	658	233	750	1653	340	49
225/60R17	99H	6½J	702	228	775	1709	300	44
225/65R17	102H	6½J	724	228	850	1874	300	44
235/65R17	108H XL	7J	738	240	1000	2205	340	49
265/65R17	112T	8J	776	272	1120	2469	300	44
215/55R18	99V XL	7J	693	226	775	1709	340	49
225/40R18	92V XL	8J	637	230	630	1389	340	49
225/45R18	95V XL	7½J	659	225	690	1521	340	49
225/55R18	98V	7J	705	233	750	1653	300	44
235/45R18	98H XL	8J	669	236	750	1653	340	49
235/50R18	101V XL	7½J	693	245	825	1819	340	49
235/65R18	110H XL	7.0J	763	240	1060	2337	340	49
235/55R18	104V XL	7½J	715	245	900	1984	340	49
225/60R18	104V XL	6.5J	727	228	900	1984	340	49
235/60R18	107H XL	7J	739	240	975	2149	340	49
265/60R18	114V XL	8.0J	775	272	1180	2601	340	49

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure	
285/60R18	120V XL	8.5J	799	292	1400	3086	340	49
225/45R19	96V XL	7½J	685	225	710	1565	340	49
225/55R19	99V	7J	731	233	775	1709	300	44
235/40R19	96H XL	8½J	671	241	710	1565	340	49
235/60R19	107H XL	7J	765	240	975	2150	340	49
255/45R19	104V XL	8.5J	713	255	900	1984	340	49
255/55R19	111V XL	8J	763	265	1090	2403	340	49
235/50R19	103V XL	7½J	719	245	875	1929	340	49
235/55R19	105V XL	7½J	741	245	925	2039	340	49
245/40R19	98V XL	8½J	679	248	750	1653	340	49
245/45R19	102V XL	8J	703	243	850	1874	340	49
255/50R19	107V XL	8J	739	265	975	2149	340	49
275/35R19	100V XL	9½J	675	278	800	1764	340	49
235/55R20	105V XL	7.5J	766	245	925	2039	340	49
245/45R20	103V XL	8J	728	243	875	1929	340	49
245/50R20	105H XL	7.5J	754	253	925	2039	340	49
255/45R20	105V XL	8½J	738	255	925	2039	340	49
275/40R20	106H XL	9½J	728	278	950	2094	340	49
275/45R20	110V XL	9J	756	273	1060	2337	340	49
285/50R20	116H XL	9J	794	297	1250	2756	340	49
315/35R20	110H XL	11J	728	320	1060	2337	340	49
235/50R20	104V XL	7.5J	744	245	900	1984	340	49
245/40R20	99V XL	8½J	704	248	775	1709	340	49
255/50R20	109V XL	8J	764	265	1030	2271	340	49
255/55R20	110V XL	8J	788	265	1060	2337	340	49
265/45R21	108V XL	9J	771	266	1000	2205	340	49
275/40R21	107V XL	9.5J	753	278	975	2149	340	49
275/45R21	110V XL	9J	781	273	1060	2337	340	49

*SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure	
285/40R21	109H XL	10J	761	290	1030	2271	340	49
315/35R21	111V XL	11J	753	320	1090	2403	340	49
315/40R21	115V XL	11J	785	320	1215	2679	340	49
275/35R22	104V XL	9.5J	751	278	900	1984	340	49
315/30R22	107V XL	11J	749	320	975	2149	340	49
285/40R23	111V XL	10J	812	290	1090	2403	340	49
325/35R23	115V XL	11.5J	812	331	1215	2679	340	49

Ice and snow trailblazer



Snow&Ice



Stability




Drainage



Braking


Performance test:

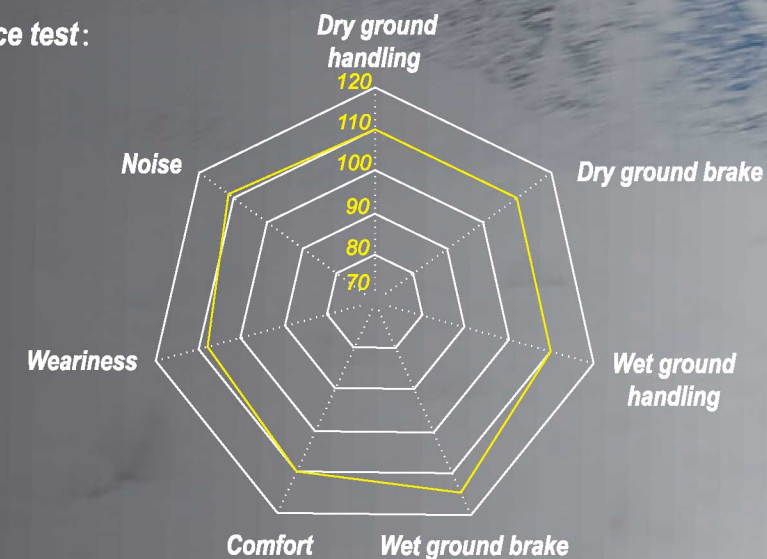

LanderStuds ATL77



Snow studs matrix determined by simulation analysis
The studs layout formed by complex computer calculations, maximizes balanced the driving traction so that the middle studs increase acceleration and braking grip, while the shoulder studs provide maximizes grip during turns and lane changes. It also has excellent traction on curves and when passing on icy and snowy roads.



Appropriate number of snow studs
150-200 snow studs, the optimal number, enables tyres to provide better silence and lower fuel consumption while maintaining ground traction than comparable products.



Tread center claw design
The sharp claw design in the center of tread ensures the straight running stability.



Wide V-shaped single guide grooves
Even on the melting snow and ice pavement, the wide V-shaped single guide grooves can effectively improve the drainage and mud discharge efficiency and ensure effective grip on the ground.



Complex main grooves curve
A large number of zigzag lines and serrated lines are designed on the grooves wall and edge to effectively improve traction and braking performance.



Jagged shoulder design
The shoulder is supported by a zigzag design with sharp angled edges to improve grip on icy surfaces during turns.



Low stud fall off probability
Based on a new generation of silica nano-composites, the modulus design that matches the rigidity of the pin material makes the pin not slip during tire driving, and exerts stable snow grasping performance.



LanderStuds ATL77

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
155/70R13	75T	4½J	548	157	387	853	300	44	-
175/70R13	82T	5J	576	177	475	1047	300	44	-
175/65R14	86T XL	5J	584	177	530	1168	340	49	-
175/70R14	84T	5J	602	177	500	1102	300	44	-
185/60R14	82T	5½J	578	189	475	1047	300	44	-
185/65R14	90T XL	5½J	596	189	600	1323	340	49	-
185/70R14	92T XL	5½J	616	189	630	1389	340	49	-
185/55R15	86T XL	6J	585	194	530	1168	340	49	-
185/60R15	88T XL	5½J	603	189	560	1235	340	49	-
185/65R15	88T	5½J	621	189	560	1235	300	44	-
195/50R15	82S	6J	577	201	475	1047	300	44	-
195/55R15	85H	6J	595	201	515	1135	300	44	-
195/60R15	92T XL	6J	615	209	630	1389	340	49	-
195/65R15	95T XL	6J	635	201	690	1521	340	49	-
205/65R15	94T	6J	647	209	670	1477	300	44	-
205/70R15	96T	6J	669	209	710	1565	300	44	-

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
205/75R15	97T	5.5J	689	203	730	1609	300	44	-
195/55R16	91T XL	6J	620	201	615	1356	340	49	-
205/55R16	94T XL	6½J	632	214	670	1477	340	49	-
205/60R16	96T XL	6J	652	209	710	1565	340	49	-
215/55R16	97T XL	7J	642	226	730	1609	340	49	-
215/60R16	99T XL	6½J	664	221	775	1709	340	49	-
215/65R16	102T XL	6½J	686	221	850	1874	340	49	-
215/70R16	100T	6½J	708	221	800	1764	300	44	-
185/75R16C	104/102R-8PR	5J	684	184	900/850	1984/1874	475	69	-
195/75R16C	107/105R-8PR	5½J	698	196	975/925	2149/2039	475	69	-
225/75R16C	118/116R-10PR	6J	744	223	1320/1250	2910/2756	525	76	-

Snow leader



Snow&Ice



Comfort




Drainage



High performance

Performance test:

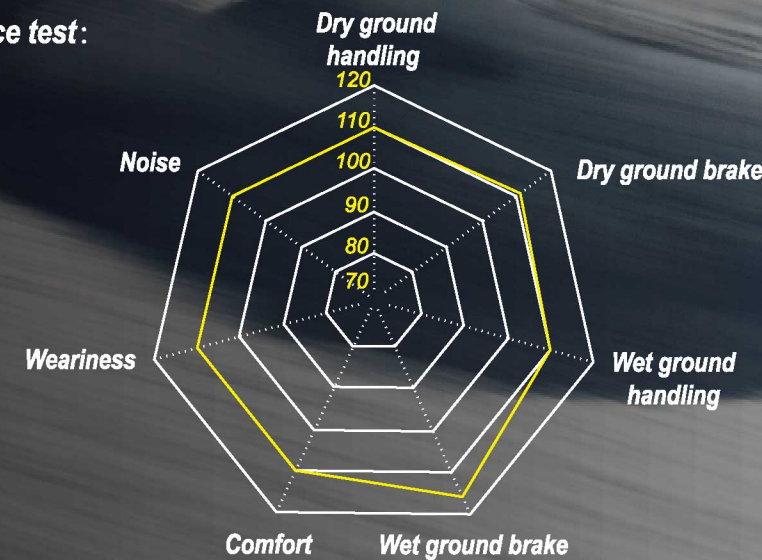

LanderStuds ATL78



Special Zigzag Groove Design

The zigzag pattern groove design provides superior traction on snowy surfaces. The special design of the groove edges and chamfers further enhances snow expulsion, improving traction on snow.



V-Shaped Block Design

Large V-shaped blocks with serrated edges ensure effective grip on snow, providing strong traction and braking power.



Optimized Stud Hole Design

Unique shaping around the stud holes effectively disperses the ice dust generated by the studs contacting the ground.



Shallow Groove Design

Enhances the tread pattern's ability to absorb water films, improving adhesion on hard snow and icy surfaces.




3D Sine Wave Steel Sheet Design

The 3D sine wave pattern of the steel sheets offers stronger snow traction, ensuring sufficient grip on snowy surfaces. Effectively controls the deformation of the steel sheet positions, enhancing the tire's driving stability.



New Tread Compound Formula Application

A new generation of low glass transition temperature rubber composite materials can improve the adaptability of harsh environments such as severe cold, and the wide glass transition area ensures that the rubber formula is soft at low temperature, while maximizing the modulus retention rate, and widening the working temperature field of tires. Keep the rubber elasticity.



Wide Profile Design

Optimized tread curve shape ensures even distribution of ground pressure. The wide driving surface and deeper grooves further enhance the tire's acceleration and braking performance on snow.



LanderStuds ATL78

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
225/70R16	107T XL	6½J	722	228	975	2149	340	49	-
245/70R16	111T XL	7J	750	248	1090	2403	340	49	-
225/75R16	108T XL	6J	744	223	1000	2205	340	49	-
205/50R17	93T XL	6½J	638	214	650	1433	340	49	-
215/50R17	95T XL	7J	648	226	690	1521	340	49	-
215/55R17	98T XL	7J	668	226	750	1653	340	49	-
215/60R17	100T XL	6½J	690	221	800	1764	340	49	-
225/45R17	94T XL	7½J	634	225	670	1477	340	49	-
225/50R17	98H XL	7J	658	233	750	1653	340	49	-
225/65R17	106T XL	6½J	724	228	950	2094	340	49	-
225/55R17	101H XL	7J	680	233	825	1819	340	49	-
225/60R17	103T XL	6½J	702	228	875	1929	340	49	-
235/65R17	108T XL	7J	738	240	1000	2205	340	49	-
265/65R17	112T	8J	776	272	1120	2469	300	44	-
215/55R18	95T	7J	693	226	690	1521	300	44	-
225/45R18	95T XL	7½J	659	225	690	1521	340	49	-
225/55R18	102T XL	7J	705	233	850	1874	340	49	-
225/60R18	104T XL	6½J	727	228	900	1984	340	49	-
235/45R18	98T XL	8J	669	236	750	1653	340	49	-
235/55R18	104T XL	7½J	715	245	900	1984	340	49	-
235/60R18	103T	7J	739	240	875	1929	300	44	-
235/65R18	110T XL	7J	763	240	1060	2337	340	49	-
265/60R18	114T XL	8J	775	272	1180	2601	340	49	-
235/35R19	9IT XL	8.5J	647	241	615	1356	340	49	-
235/50R19	103T XL	7½J	719	245	875	1929	340	49	-

SIZE	Index	Rim	OA.diameter	Width	Max Loading Capacity		Max Permissive Pressure		UTQG
225/45R19	96T XL	7½J	685	225	710	1565	340	49	-
225/55R19	103T XL	7J	731	233	875	1929	340	49	-
235/55R19	105T XL	7½J	741	245	925	2039	340	49	-
245/40R19	98T XL	8½J	679	248	750	1653	340	49	-
245/45R19	102 TXL	8J	703	243	850	1874	340	49	-
245/55R19	107T XL	7½J	753	253	975	2149	340	49	-
255/45R19	104T XL	8.5J	713	255	900	1984	340	49	-
255/50R19	107T XL	8J	739	265	975	2149	340	49	-
265/55R19	113T XL	8½J	775	277	1150	2535	340	49	-
235/55R20	102T	7½J	766	245	850	1874	300	44	-
245/45R20	103T XL	8J	728	243	875	1929	340	49	-
245/50R20	105T XL	7.5J	754	253	925	2039	340	49	-
255/45R20	101T	8½J	738	255	825	1819	300	44	-
255/50R20	109T XL	8J	764	265	1030	2271	340	49	-
255/55R20	110T XL	8J	788	265	1060	2337	340	49	-
265/50R20	111T XL	8½J	774	277	1090	2403	340	49	-
275/40R20	102T	9½J	728	278	850	1874	300	44	-
275/45R20	110T XL	9J	756	273	1060	2337	340	49	-
285/50R20	112T	9J	794	297	1120	2469	300	44	-
315/35R20	106T	11J	728	320	950	2094	300	44	-
265/45R21	104T	9J	771	266	900	1984	300	44	-
275/45R21	110T XL	9J	781	273	1060	2337	340	49	-
295/40R21	107T	10½J	769	301	975	2149	300	44	-
265/40R22	106T XL	9.5J	771	271	950	2094	340	49	-
275/40R22	107T XL	9.5J	778	278	975	2149	340	49	-
315/35R21	111T XL	11	753	320	1090	2403	340	49	-